


# PMW 75D2/IXL

12NC: 859991546910

GTIN (EAN) code: 8003437231957

Whirlpool

SENSING THE DIFFERENCE

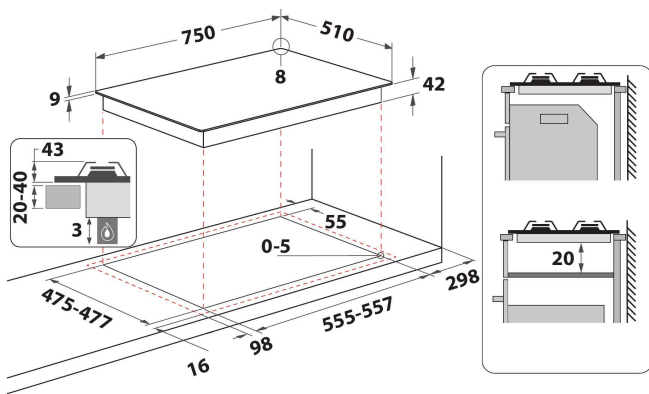

- Cast Iron Pan Supports
- Electromagnetic safety device for each burner
- Brushed chrome knobs
- 3 W Collection PreciseFlame Cast Iron grids
- Front controls
- 75 cm hob
- Ignition type: knob
- 5 Burners
- 5 burners: 1 FTGH Auxiliary 1000 W burner, 1 FTGH Semi-Fast 1900 W burner, 1 FTGH Semi-Fast 1900 W burner, 1 FTGH Auxiliary 1000 W burner, and 1 FTGH Fast 3000 W burner.
- Supply cord included
- Dimensions HxWxD: 40x750x510 mm
- Voltage: 220-240 V
- Gas Type: Only Gas-Methane 20 mBar
- Front left zone: 110 mm Ø, FTGH Auxiliary 1000 W

## Whirlpool gas hob: 5 gas burners - PMW 75D2/IXL

Standard Whirlpool technologies and features for you to enjoy.



### iXelium

Long lasting shine. The revolutionary iXelium treatment protects your hob from scratches and corrosion, ensuring a perfect shine, always. And, it's easy to clean: all you need is water and a soft cloth.



### PreciseFlame

Innovative flame system. The unique vertical flame distribution system ensures your pots and pans are heated more efficiently and rapidly, helping you enjoy perfect cooking results.



### Dishwashable Grids

Keep your hob clean easily and safely thanks to the dishwasher safe grids.



### Speed to Boil

Enjoy faster boiling. Our innovative technology, by effectively harnessing the energy of the flames, ensures more heat is delivered directly to your pots and pans allowing you to enjoy ideal cooking results, sooner.



### Full width cast iron grids

The full-width cast-iron pan support maximises the cooking surface with an edge-to-edge design so pans can slide effortlessly from one burner to another without any lifting and is durable enough to withstand damage and prevent rusting or scratching. Cooktop grids are made of cast iron, a top performing material resistant to high temperatures, durable in time that perfectly transmit heat. Restyled for added comfort and beauty, the distinctive design of the ergonomic knobs ensures easier use, greater control, and easeness of cleaning on steel and glass models.



### Booster

Enjoy super fast boiling times with the Booster cooking zone.



### Cast Iron Supports

Cast Iron pan supports for that professional look and maximum stability in use.



### Easy to clean

Easy cleaning. With our easy-to-clean surfaces, all you need to make your hob shine is a clean, damp cloth.



### Front Controls

Complete control over your cooking. Easily accessible and genuinely intuitive, the controls are conveniently positioned on the front panel of your hob, providing a frictionless cooking experience.

# PMW 75D2/IXL

12NC: 859991546910

GTIN (EAN) code: 8003437231957

**Whirlpool**

SENSING THE DIFFERENCE

## MAIN FEATURES

|                                       |                          |
|---------------------------------------|--------------------------|
| Product group                         | Hob                      |
| Construction type                     | Built-in                 |
| Type of control                       | N/A                      |
| Type of control settings              | Knob                     |
| Number of gas burners                 | 5                        |
| Number of electric cooking zones      | 0                        |
| Number of electric plates             | 0                        |
| Number of radiant plates              | 0                        |
| Number of halogen plates              | 0                        |
| Number of induction plates            | 0                        |
| Number of electric warming zones      | 0                        |
| Location of control panel             | Front                    |
| Basic surface material                | Inox                     |
| Main colour of product                | Inox Ixelium             |
| Electrical connection rating (W)      | 0                        |
| Gas connection rating (W)             | 0                        |
| Gas type                              | Only Gas-Methane 20 mBar |
| Current (A)                           | 0                        |
| Voltage (V)                           | 220-240                  |
| Frequency (Hz)                        | 50/60                    |
| Length of Electrical Supply Cord (cm) | 0                        |
| Plug type                             | No                       |
| Gas connection                        | N/A                      |
| Width of the product                  | 750                      |
| Height of the product                 | 40                       |
| Depth of the product                  | 510                      |
| Minimum niche height                  | 0                        |
| Minimum niche width                   | 555                      |
| Niche depth                           | 475                      |
| Net weight (kg)                       | 14.9                     |
| Automatic programmes                  | No                       |

## TECHNICAL FEATURES

|                         |                           |
|-------------------------|---------------------------|
| Power on indicator      | No                        |
| Number of indicators    | 0                         |
| Type of regulation      | Stepless energy regulated |
| Type of lid             | Without                   |
| Residual heat indicator | Without                   |
| Main on/off switch      | No                        |
| Safety device           | -                         |
| Timer                   | No                        |

## PERFORMANCES

|              |     |
|--------------|-----|
| Energy input | Gas |
|--------------|-----|