


AKM 274

GB




PRODUCT DESCRIPTION SHEET

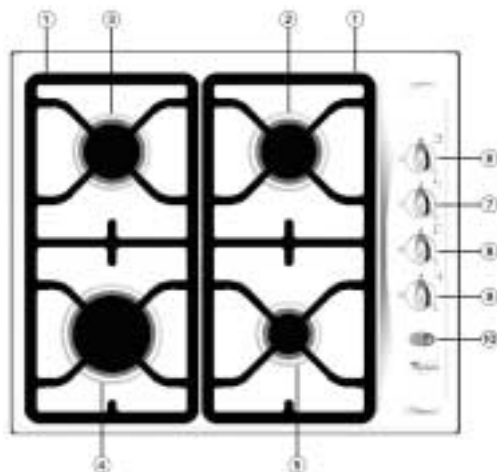

1. Removable panstand grids
- 2-3. Medium burners
4. Large burner
5. Small burner
6. Medium burner control knob
7. Medium burner control knob
8. Large burner control knob
9. Small burner control knob
10. Electric ignition button




Symbols

Shaded circle		Tap closed
Large flame		Maximum opening delivery
Small flame		Minimum opening or reduced delivery


Operation of burners with safety device and electric ignition

To light one of the burners:


- Press the relative knob and turn it anti-clockwise to the large flame and star setting .
- At the same time, keep the knob pressed against the control panel until the burners ignites.
- After the burner has ignited, keep the knob pressed for about 10 seconds.
- Release the knob.

If the burner does not ignite, repeat the operations described above.

Note:

- Should particular local conditions of the delivered gas make the ignition of the burner difficult, it is advisable to repeat the operation with the knob turned to the small flame setting .
- The safety device of the burner shuts off the gas supply to the burner if its flame goes out accidentally (because of a sudden gust of wind, an interruption in the gas delivery, the overflowing of liquids, etc.).

DIMENSIONS OF COOKING HOB AND WORKTOP (mm)

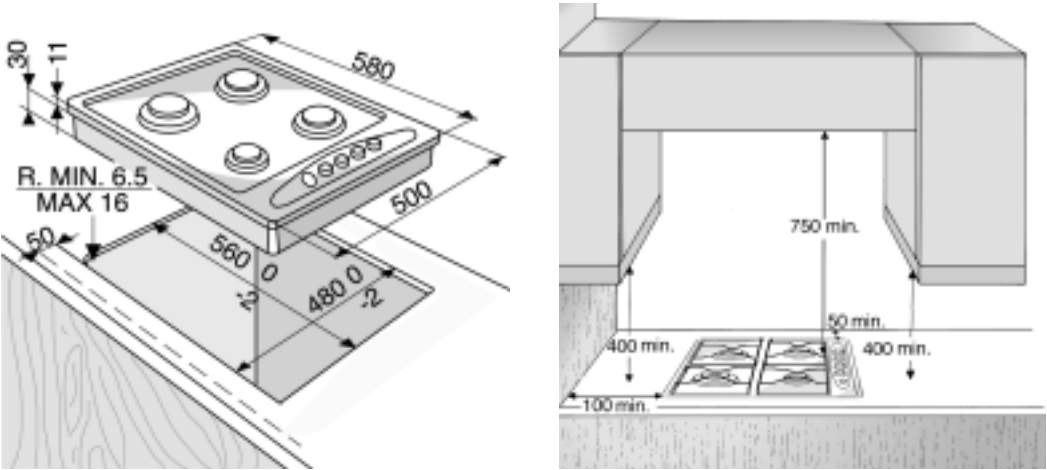

NOTE: In case of installation of a hood above the cooktop, please refer to the hood instructions for the correct distance.

INJECTORS TABLE

CATEGORY II2H3+

Type of gas used	Type of burner	Injector marking	Rated heat capacity kW	Rated consumption	Reduced heat capacity kW	Gas pressure mbar		
						min.	rat.	max.
NATURAL GAS (Methane) G20	large	Y 115	3.00	286 l/h	0.60	17	20	25
	medium	H2 98	1.65	157 l/h	0.35			
	small	X 72	1.00	95 l/h	0.30			
LIQUID PETROLEUM GAS (Cylinder) G30	large	87	3.00	218 l/h	0.60	20	28-30	35
	medium	65	1.65	120 l/h	0.35			
	small	50	1.00	73 l/h	0.30			
LIQUID PETROLEUM GAS (Cylinder) G31	large	87	3.00	214 l/h	0.60	25	37	45
	medium	65	1.65	118 l/h	0.35			
	small	50	1.00	71 l/h	0.30			

Type of gas used	Appliance model	Total rated heat capacity kW	Total rated consumption	Air necessary (m ³) for the combustion of 1 m ³ of gas
G20 20 mbar	4 gas	7.30	695 l/h	9.52
G25 28-30 mbar	4 gas	7.30	531 g/h	30.94
G31 37 mbar	4 gas	7.30	521 g/h	23.80

ELECTRIC SUPPLY: 230 V ~ 50 Hz