
AKR 769 GY

12NC: 857876915000

GTIN (EAN) code: 8003437747892





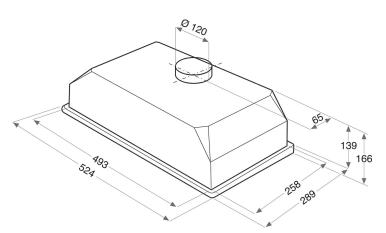

- Maximum noise level 58 dBA
- Noise Level (min. max.): 48-58 dBA
- Air Flow (min. max.): 115, 175 m3/h
- Maximum extraction rate: 175 (m3/h)
- Energy class E
- 3 speed settings
- Integrated controls
- Odour Filter
- 2 Halogen, 56 W lamps
- 1 x 100 W motor
- · Mechanical Slider
- 1 Washable aluminium filter
- Grease Filtering Efficiency Class: E
- Lighting Efficiency Class: G
- Fluid Dynamic Efficiency Class: F
- Operating Mode: Air extraction, Recirculating air
- Grey Finishing

Whirlpool integrated cooker hood - AKR 769 GY

This Whirlpool integrated Cooker Hood features: dishwasher-safe, washable aluminium grease filters. An outstanding cooker extractor fan, ensuring a fresh, grease-free cooking environment. Less than 60cm wide appliance. New design ensuring extra silent performance.



Carbon Filter Included

Enjoy fresh air in your kitchen, always. This Whirlpool Hood includes a carbon purifying air filter, that effectively protects your kitchen from odours and grease.



Flexible Installation

Flexible installation options. This Whirlpool Hood can be operated in either Ducted or Recirculated mode (filter needed), so you can enjoy complete freedom when designing your kitchen.



Mechanical control

Effortless control. This Whirlpool Hood includes an analogue control interface designed for simplicity and ease-of-use.



3 Speeds

Versatile performance. This Whirlpool Hood offers 3 speed options, giving you complete control over the extraction rate.



Super Silent

Silent efficiency. This Whirlpool Hood is designed to operate at low noise-levels, so you can enjoy some extra peace and quiet.



Built-in installation

The perfect fit. This built-in Whirlpool Hood is easy to install, and designed to fit in perfectly with your kitchen layout.



Total annual energy consumption

Ideal performance, outstanding savings. Whirlpool Hoods are designed to provide exceptional results, while reducing energy costs.



Fully integrated

An integrated hood - perfect for kitchens where the hood is not directly on show.



Mechanical Slider

Effortless control. This Whirlpool Hood features a slider controller, providing effortless control of your appliance.



Halogen Lamps

Halogen lamps generate 3 times more light than normal lamps, so you can always see what's cooking.

AKR 769 GY

12NC: 857876915000

Net weight (kg)

GTIN (EAN) code: 8003437747892



Product group Hood Colour body Grey Material body Metal Colour chimney Material chimney Material chimney Built-in/Built-under Installation type Built-in/Built-under Installation type Mechanical Type of control Mechanical Type of control settings Becor panel options N/A Motor location Integrated motor in hood body Operating Mode Convertible Electrical connection rating (W) 156 Current (A) 0,7 Voltage (V) 20-240 Frequency (Hz) 50/60 Length of Electrical Supply Cord (cm) 150 Plug type No Chimney height (mm) 6 Height of product, without chimney (mm) 166 Height of product, without chimney (mm) 166 Width of the product 288 Minimum niche height 0 Minimum niche width 0 Niche depth	MAIN FEATURES		
Material body Metal Colour chimney - Material chimney - Typology Built-in/Built-under Installation type Built-in Type of control Mechanical Type of control settings - Decor panel options N/A Motor location Integrated motor in hood body Operating Mode Convertible Electrical connection rating (W) 156 Current (A) 0,7 Voltage (V) 220-240 Frequency (Hz) 50/60 Length of Electrical Supply Cord (cm) 150 Plug type No Chimney height (mm) 0-0 Height of product, without chimney (mm) 166 Height of the product 524 Depth of the product 289 Minimum niche height 0 Minimum niche width 0	Product group	Hood	
Colour chimney - Material chimney - Typology Built-in/Built-under Installation type Built-in Type of control Mechanical Type of control settings - Decor panel options N/A Motor location Integrated motor in hood body Operating Mode Convertible Electrical connection rating (W) 156 Current (A) 0,7 Voltage (V) 220-240 Frequency (Hz) 50/60 Length of Electrical Supply Cord (cm) 150 Plug type No Chimney height (mm) 0-0 Height of product, without chimney (mm) 166 Height of the product 289 Width of the product 289 Minimum niche height 0 Minimum niche width 0	Colour body	Grey	
Material chimney Built-in/Built-under Typology Built-in/Built-under Installation type Built-in Type of control Mechanical Type of control settings - Decor panel options N/A Motor location Integrated motor in hood body Operating Mode Convertible Electrical connection rating (W) 156 Current (A) 0,7 Voltage (V) 220-240 Frequency (Hz) 50/60 Length of Electrical Supply Cord (cm) 150 Plug type No Chimney height (mm) 0-0 Height of product, without chimney (mm) 166 Height of the product 524 Depth of the product 289 Minimum niche height 0 Minimum niche width 0	Material body	Metal	
TypologyBuilt-in/Built-underInstallation typeBuilt-inType of controlMechanicalType of control settings-Decor panel optionsN/AMotor locationIntegrated motor in hood bodyOperating ModeConvertibleElectrical connection rating (W)156Current (A)0,7Voltage (V)220-240Frequency (Hz)50/60Length of Electrical Supply Cord (cm)150Plug typeNoChinney height (mm)0-0Height of product, without chinney (mm)166Height of the product524Depth of the product524Depth of the product289Minimum niche height0Minimum niche width0	Colour chimney	-	
Installation type Built-in Type of control Type of control settings Decor panel options N/A Motor location Integrated motor in hood body Operating Mode Convertible Electrical connection rating (W) Current (A) Voltage (V) Frequency (Hz) Length of Electrical Supply Cord (cm) Plug type No Chimney height (mm) Height of product, without chimney (mm) Height of the product Width of the product Width of the product Depth of the product Winnimum niche height No Minimum niche width	Material chimney	-	
Type of control Settings - Control Settings - Convertibles - Convertible	Typology	Built-in/Built-under	
Type of control settings Decor panel options Motor location Operating Mode Electrical connection rating (W) Current (A) Voltage (V) Frequency (Hz) Length of Electrical Supply Cord (cm) Plug type Chimney height (mm) Height of product, without chimney (mm) Height of the product Width of the product Width of the product Depth of the product Width of the product Depth of the product Minimum niche height Minimum niche width No No No No No No No No No N	Installation type	Built-in	
Decor panel options N/A Motor location Integrated motor in hood body Operating Mode Convertible Electrical connection rating (W) 156 Current (A) 0,7 Voltage (V) 220-240 Frequency (Hz) 50/60 Length of Electrical Supply Cord (cm) 150 Plug type No Chimney height (mm) 0-0 Height of product, without chimney (mm) 166 Height of the product 524 Depth of the product 289 Minimum niche height 10 Minimum niche width 10 Convertible Convertible 156 No 150 No 150 166 166 166 166 166 166 166	Type of control	Mechanical	
Motor locationIntegrated motor in hood bodyOperating ModeConvertibleElectrical connection rating (W)156Current (A)0,7Voltage (V)220-240Frequency (Hz)50/60Length of Electrical Supply Cord (cm)150Plug typeNoChimney height (mm)0-0Height of product, without chimney (mm)166Height of the product524Depth of the product289Minimum niche height0Minimum niche width0	Type of control settings	-	
Operating ModeConvertibleElectrical connection rating (W)156Current (A)0,7Voltage (V)220-240Frequency (Hz)50/60Length of Electrical Supply Cord (cm)150Plug typeNoChimney height (mm)0-0Height of product, without chimney (mm)166Height of the product524Depth of the product289Minimum niche height0Minimum niche width0	Decor panel options	N/A	
Electrical connection rating (W)156Current (A)0,7Voltage (V)220-240Frequency (Hz)50/60Length of Electrical Supply Cord (cm)150Plug typeNoChimney height (mm)0-0Height of product, without chimney (mm)166Height of the product166Width of the product524Depth of the product289Minimum niche height0Minimum niche width0	Motor location	Integrated motor in hood body	
Current (A) 0,7 Voltage (V) 220-240 Frequency (Hz) 50/60 Length of Electrical Supply Cord (cm) 150 Plug type No Chimney height (mm) 0-0 Height of product, without chimney (mm) 166 Height of the product 166 Width of the product 1524 Depth of the product 1524 Depth of the product 1524 Minimum niche height 166 Minimum niche width 0	Operating Mode	Convertible	
Voltage (V)220-240Frequency (Hz)50/60Length of Electrical Supply Cord (cm)150Plug typeNoChimney height (mm)0-0Height of product, without chimney (mm)166Height of the product166Width of the product524Depth of the product289Minimum niche height0Minimum niche width0	Electrical connection rating (W)	156	
Frequency (Hz)50/60Length of Electrical Supply Cord (cm)150Plug typeNoChimney height (mm)0-0Height of product, without chimney (mm)166Height of the product166Width of the product524Depth of the product289Minimum niche height0Minimum niche width0	Current (A)	0,7	
Length of Electrical Supply Cord (cm) Plug type No Chimney height (mm) Height of product, without chimney (mm) Height of the product Width of the product Depth of the product Minimum niche height Minimum niche width 150 No 150 No 166 166 289 Minimum niche width 0	Voltage (V)	220-240	
Plug type No Chimney height (mm) 0-0 Height of product, without chimney (mm) 166 Height of the product 166 Width of the product 524 Depth of the product 289 Minimum niche height 0 Minimum niche width 0	Frequency (Hz)	50/60	
Chimney height (mm) Height of product, without chimney (mm) Height of the product Width of the product Depth of the product Minimum niche height Minimum niche width O-0 166 289 Minimum niche width O Minimum niche width	Length of Electrical Supply Cord (cm)	150	
Height of product, without chimney (mm) Height of the product Width of the product Depth of the product Minimum niche height Minimum niche width 166 289 Minimum niche width 0	Plug type	No	
Height of the product 166 Width of the product 524 Depth of the product 289 Minimum niche height 0 Minimum niche width 0	Chimney height (mm)	0-0	
Width of the product 524 Depth of the product 289 Minimum niche height 0 Minimum niche width 0	Height of product, without chimney (mm)	166	
Depth of the product 289 Minimum niche height 0 Minimum niche width 0	Height of the product	166	
Minimum niche height 0 Minimum niche width 0	Width of the product	524	
Minimum niche width 0	Depth of the product	289	
	Minimum niche height	0	
Niche depth 0	Minimum niche width	0	
	Niche depth	0	

TECHNICAL FEATURES		
Type of manual control devices	Slider	
Type of automatic control devices	-	
Number of motors	1	
Total power of the motors (W)	100	
Number of speed settings: boost option availability	3	
Boost presence	No	
Maximum output air extraction (m³/h)	235	
Boost position air extraction (m³/h)	0	
Maximum output recirculating air (m³/h)	150	
Boost position output recirculating (m³/h)	0	
Light Control Type	Steps	
Number of lights	2	
Type of lamps used	Halogen	
Total power of the lamps (W)	56	
Diameter of air outlet (mm)	120	
No-return airflow flap	No	
Grease filter material	Washable aluminium	
Odour filter	Yes	

PERFORMANCES	
Sound power at min. speed (2010/30/EU)	48
Sound power at max. speed (2010/30/EU)	58
Noise level with boost position (dB(A) re 1 pW)	0

