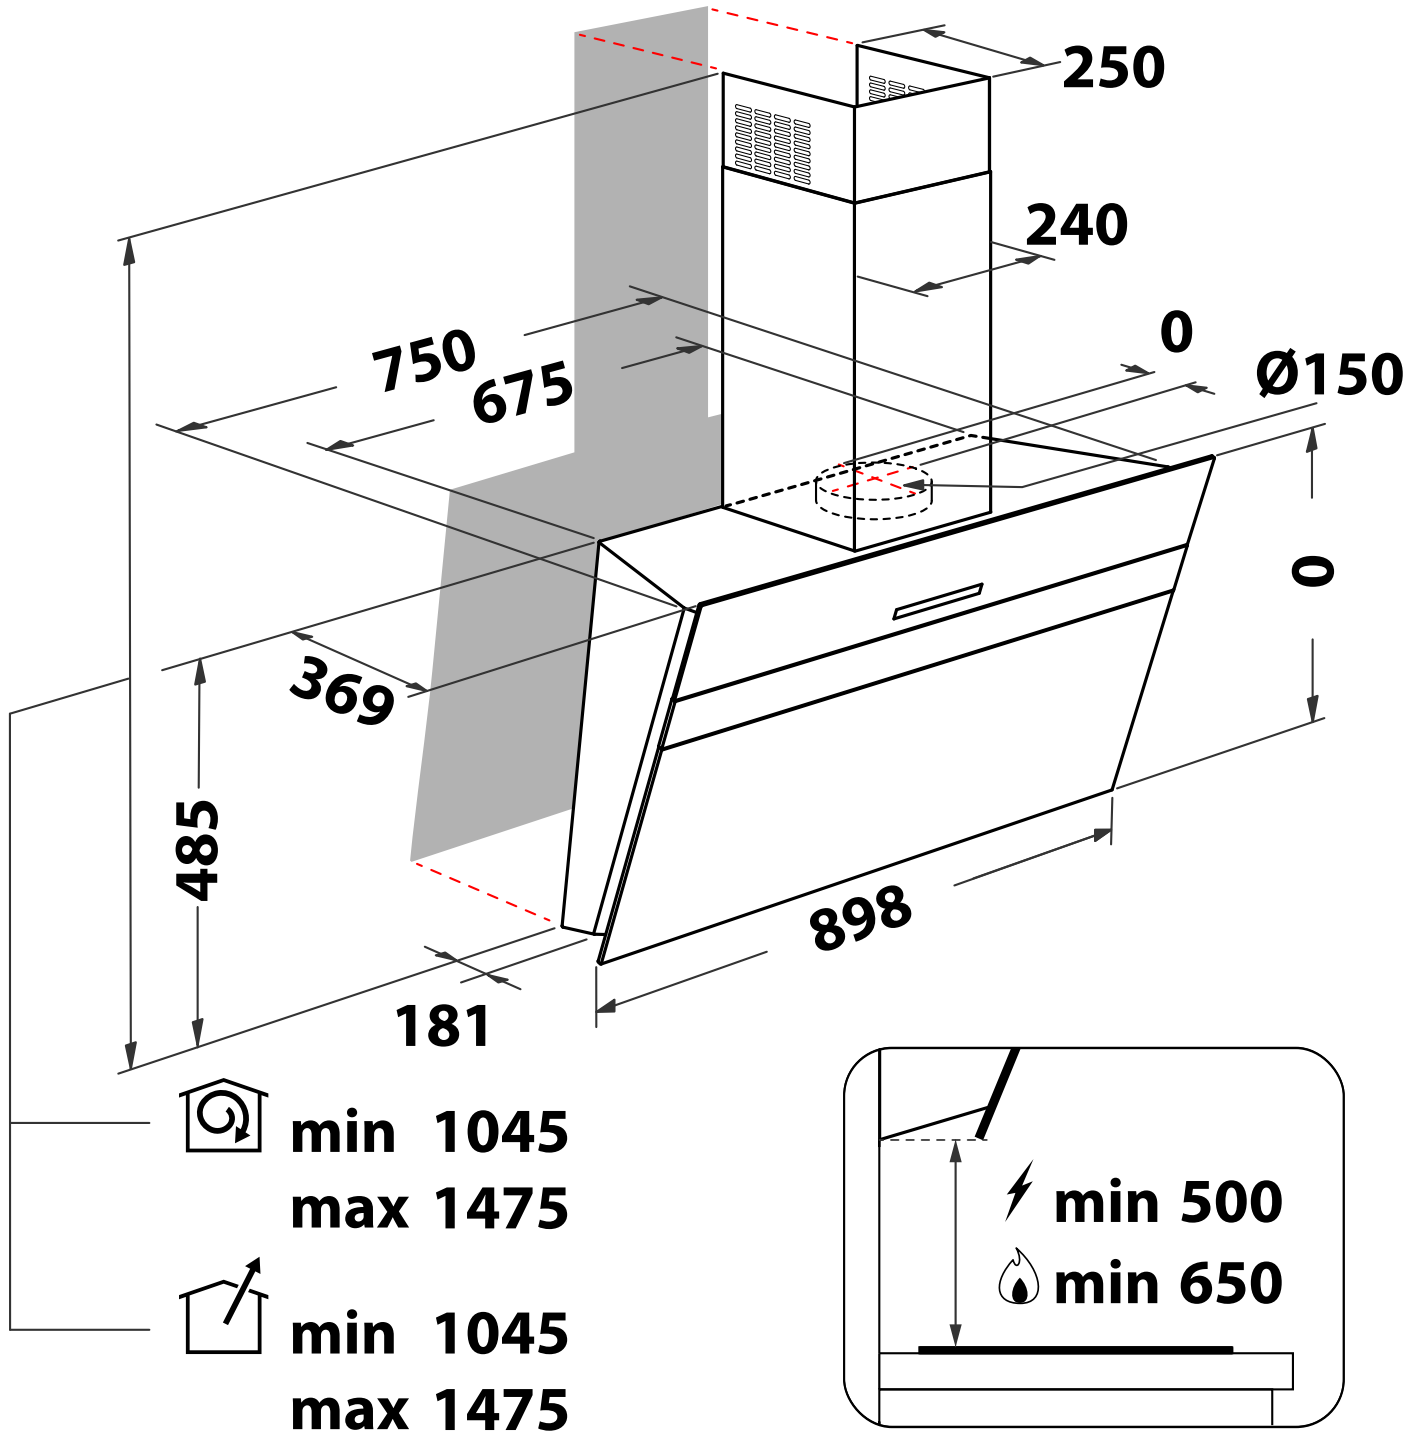
250
240
0
Ø150
750
675
0
369
485
898
181
min 1045
max 1475
min 1045
max 1475
min 500
min 650

WHVS 91F LT DP K

12NC/Fx: 859991678100

GTIN (EAN) code: 8003437056123

DIMENSION	MEASURE	
WOODEN CABINET		
OVERALL CABINET		
01. Height MIN Niche, including all required space for installation or ventilation (HMIN)	0	mm
02. Height MAX Niche, including all required space for installation or ventilation (HMAN)	0	mm
03. Width MIN Niche, including all required space for installation or ventilation (WMIN)	0	mm
04. Width MAX Niche, including all required space for installation or ventilation (WMAN)	0	mm
05. Depth Niche, including all required space for installation or ventilation (DN)	0	mm
06. Indicates whether a ventilation opening is needed or not. Default is "Y"	-	Y/N
Vent-shaft outgoing		
07. Area MIN for outgoing ventilation (VC_O)	0	
APPLIANCE		
Overall Appliance		
01. Height MIN product body (HMIPB)	485	mm
02. Height MAX product body (HMAPB)	0	mm
03. Height MIN product in ducting mode (HMIPD)	1045	mm
04. Height MAX product in ducting mode (HMAPD)	1475	mm
05. Height MIN product in recirculating mode (HMIPR)	1045	mm
06. Height MAX product in recirculating mode (HMAPR)	1475	mm
07. Width product (WP)	898	mm
08. Depth product (DP)	0	mm
09. Depth product body (DPB)	0	
10. Width product body (WPB)	0	mm
11. Space in front, which is required to guarantee full operability. The most protruding part gives this dimension (RSF)	0	mm
12. Power cord positioning from the middle of product body (PCD)	0	mm
13. Aesthetic thickness: glass, protrution, etc. (AT)	0	mm
27. Height of the air outlet	-	mm
28. Width of the upper part of the body	-	mm
29. Width of the lower part of the body	-	mm
30. Depth of the upper part of the body	369	mm
31. Depth of the lower part of the body	181	mm
32. Height of the upper part of the body	-	mm
33. Height of the lower part of the body	-	mm
34. Width of the back part of the product body	675	mm
35. Width of the front part of the product body	750	mm
36. Width of the cut for perimetral panel	-	mm
37. Depth of the cut for perimetral panel	-	mm
38. Width of the lights	-	mm
39. Distance from perimetral panel cut to the edge of the product	-	mm
40. Depth at maximum height	-	mm
41. Depth at minimum height	-	mm
42. Min-max height of the aesthetical panel	-	mm
43. Min-max width of the aesthetical panel	-	mm
Built In - Free Standing - Decorative		
14. Indicates position of the user interface	-	
15. Height from bottom line hood to top line air outlet (HM)	0	mm
16. Diameter air outlet (ØAO)	150	mm
17.Indicates measure between center of air outlet hole and rear wall (DAOW)	0	mm
18. Distance between hole and lateral product body end (DTHX)	0	mm