
## **AKR 759 IX**

12NC: 857875901000

GTIN (EAN) code: 8003437218255





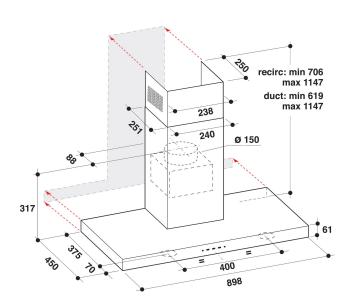

- 6TH Sense technology
- Maximum noise level 69 dBA
- Noise Level (min. max.): 52-69 dBA
- Air Flow (min. max.): 304, 581, booster 713 m3/h
- Maximum extraction rate: 581 (m3/h)
- Energy class B
- Extraction / Recirculation Rate 650 / 356 m3/h
- Speeds: 4 + Booster
- 2 Halogen, 20 W lamps
- 1 x 250 W motor
- · Electronic Touch control
- 3 Washable aluminium filters
- Grease Filtering Efficiency Class: C
- Lighting Efficiency Class: F
- Fluid Dynamic Efficiency Class: B
- Operating Mode: Air extraction, Recirculating air
- Inox Finishing

## Whirlpool wall mounted cooker hood - AKR 759 IX

This Whirlpool wall mounted Cooker Hood features: dishwasher-safe, washable aluminium grease filters. An outstanding cooker extractor fan, ensuring a fresh, grease-free cooking environment. Between 60cm and 90cm wide appliance. Exclusive 6th SENSE sensor technology that dynamically adjusts energy consumption, depending on what your are cooking. High-efficiency S40HE motor.



#### **Electronic control**

Effortless control. This Whirlpool Hood includes an intuitive electronic user interface, designed to provide you with the simplest, most satisfying user experience ever.



### High efficency motor

Efficiency first. The motor in this Whirlpool Hood is designed to provide ideal filtration, while ensuring high energy efficiency.



## **6th Sense Absolute**

Easy interaction approach thanks to the intuitive icons on the UI.



#### 4 Speeds

Versatile performance. This Whirlpool Hood offers 4 speed options, giving you complete control over the extraction rate.



## **Absolute Design Collection**

This Whirlpool Hood is part of our Absolute Collection, featuring exquisite design and details. Enjoy both ideal functionality and outstanding elegance.



## Total annual energy consumption

Ideal performance, outstanding savings. Whirlpool Hoods are designed to provide exceptional results, while reducing energy costs.



## **Flexible Installation**

Flexible installation options. This Whirlpool Hood can be operated in either Ducted or Recirculated mode (filter needed), so you can enjoy complete freedom when designing your kitchen.



### **TIMER**

Perfect timing. This Whirlpool Hood includes an intuitive timer, for added convenience.



## Touch control user interface

Intuitive controls. The stylish touch-control user interface provides simple, immediate access to all of your hood's settings and functions.



## Booster

Odour-free cooking. This Whirlpool Hood features an extraction booster, that ensures ideal air filtration and odour and grease aspiration.

# **AKR 759 IX**

12NC: 857875901000

GTIN (EAN) code: 8003437218255



SENSING THE DIFFERENCE

MAIN FEATURES		
Product group	Hood	
Colour body	Inox	
Material body	Stainless steel	
Colour chimney	Inox	
Material chimney	Stainless steel	
Typology	Manual	
Installation type	Wall-mounted	
Type of control	Electronic	
Type of control settings	-	
Decor panel options	N/A	
Motor location	Integrated motor in hood chimney	
Operating Mode	Convertible	
Electrical connection rating (W)	280	
Current (A)	1,2	
Voltage (V)	220-240	
Frequency (Hz)	50	
Length of Electrical Supply Cord (cm)	150	
Plug type	Schuko	
Chimney height (mm)	580	
Height of product, without chimney (mm)	60	
Height of the product	619	
Width of the product	898	
Depth of the product	450	
Minimum niche height	0	
Minimum niche width	0	
Niche depth	0	
Net weight (kg)	19.3	

TECHNICAL FEATURES	
Type of manual control devices	Touch control
Type of automatic control devices	-
Number of motors	1
Total power of the motors (W)	250
Number of speed settings: boost option availability	4
Boost presence	Yes
Maximum output air extraction (m³/h)	704
Boost position air extraction (m³/h)	704
Maximum output recirculating air (m³/h)	356
Boost position output recirculating (m³/h)	356
Light Control Type	On/Off
Number of lights	2
Type of lamps used	Halogen
Total power of the lamps (W)	20
Diameter of air outlet (mm)	150
No-return airflow flap	Yes
Grease filter material	Washable aluminium
Odour filter	No

PERFORMANCES	
Sound power at min. speed (2010/30/EU)	52
Sound power at max. speed (2010/30/EU)	69
Noise level with boost position (dB(A) re 1 pW)	0

