


AKR 473/1 IX

12NC: 859991551320

GTIN (EAN) code: 8003437233708

Whirlpool

SENSING THE DIFFERENCE

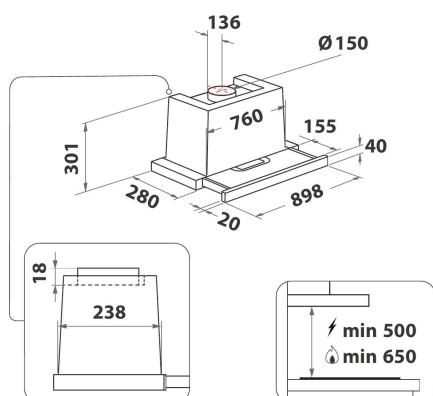

- Maximum noise level 66 dBA
- Air Flow (min. - max.): 288, 603, booster 735 m3/h
- Maximum extraction rate: 603 (m3/h)
- Energy class B
- Extraction / Recirculation Rate
%Z_REQ_MAX_OUT_EXTRACTION% / 419 m3/h
- 3 speed settings + booster
- 2 LED, 5 W lamps
- 1 x 260 W motor
- Electronic Touch control
- 2 Washable stainless steel filters
- Inox Pull-Out hood
- Grease Filtering Efficiency Class: C
- Lighting Efficiency Class: A
- Fluid Dynamic Efficiency Class: B
- Operating Mode: Air extraction, Recirculating air
- Inox Finishing

Whirlpool integrated cooker hood - AKR 473/1 IX

This Whirlpool integrated Cooker Hood features: dishwasher-safe, washable stainless steel grease filters. LED lights for ideal lighting. An outstanding cooker extractor fan, ensuring a fresh, grease-free cooking environment. New design ensuring extra silent performance.



LED lighting

Increased energy and cost efficiency. The LED lighting system lasts 10 times longer than traditional bulbs and uses 90% less energy.



Electronic control

Effortless control. This Whirlpool Hood includes an intuitive electronic user interface, designed to provide you with the simplest, most satisfying user experience ever.



Stainless Steel Filter

Enjoy fresh air in your kitchen, always. This Whirlpool Hood includes a stainless steel purifying air filter, that effectively protects your kitchen from odours and grease.



3 Speeds

Versatile performance. This Whirlpool Hood offers 3 speed options, giving you complete control over the extraction rate.



Built-in installation

The perfect fit. This built-in Whirlpool Hood is easy to install, and designed to fit in perfectly with your kitchen layout.



Total annual energy consumption

Ideal performance, outstanding savings. Whirlpool Hoods are designed to provide exceptional results, while reducing energy costs.



Carbon Filter Included

Enjoy fresh air in your kitchen, always. This Whirlpool Hood includes a carbon purifying air filter, that effectively protects your kitchen from odours and grease.



Flexible Installation

Flexible installation options. This Whirlpool Hood can be operated in either Ducted or Recirculated mode (filter needed), so you can enjoy complete freedom when designing your kitchen.



TIMER

Perfect timing. This Whirlpool Hood includes an intuitive timer, for added convenience.



Booster

Odour-free cooking. This Whirlpool Hood features an extraction booster, that ensures ideal air filtration and odour and grease aspiration.

AKR 473/1 IX

12NC: 859991551320

GTIN (EAN) code: 8003437233708

Whirlpool

SENSING THE DIFFERENCE

MAIN FEATURES

Product group	Hood
Colour body	Inox
Material body	Stainless steel
Colour chimney	N/A
Material chimney	N/A
Typology	Pull-out
Installation type	Built-in
Type of control	Electronic
Type of control settings	-
Decor panel options	Possible and included
Motor location	Integrated motor in hood body
Operating Mode	Convertible
Electrical connection rating (W)	265
Current (A)	1,2
Voltage (V)	220-240
Frequency (Hz)	50
Length of Electrical Supply Cord (cm)	150
Plug type	Schuko
Chimney height (mm)	300
Height of product, without chimney (mm)	319
Height of the product	301
Width of the product	898
Depth of the product	280
Minimum niche height	0
Minimum niche width	0
Niche depth	0
Net weight (kg)	12

TECHNICAL FEATURES

Type of manual control devices	Touch control
Type of automatic control devices	-
Number of motors	1
Total power of the motors (W)	260
Number of speed settings: boost option availability	3
Boost presence	Yes
Maximum output air extraction (m³/h)	603
Boost position air extraction (m³/h)	735
Maximum output recirculating air (m³/h)	419
Boost position output recirculating (m³/h)	0
Light Control Type	On/Off
Number of lights	2
Type of lamps used	LED
Total power of the lamps (W)	5
Diameter of air outlet (mm)	150
No-return airflow flap	Yes
Grease filter material	Washable stainless steel
Odour filter	Yes

PERFORMANCES

Sound power at min. speed (2010/30/EU)	50
Sound power at max. speed (2010/30/EU)	66
Noise level with boost position (dB(A) re 1 pW)	72

