

# AKM 261/IX

12NC: 857126135700

GTIN (EAN) code: 8003437932717

Whirlpool

SENSING THE DIFFERENCE



## Whirlpool hob: 1 electric ring, 3 gas burners - AKM 261/IX

Standard Whirlpool technologies and features for you to enjoy.




### Stainless Steel

For the stylish modern look in your kitchen.



### Lateral Controls

Practical design. Modern, beautiful and practical: the lateral controls of this Whirlpool Hob are designed to add an extra touch of style to your kitchen.

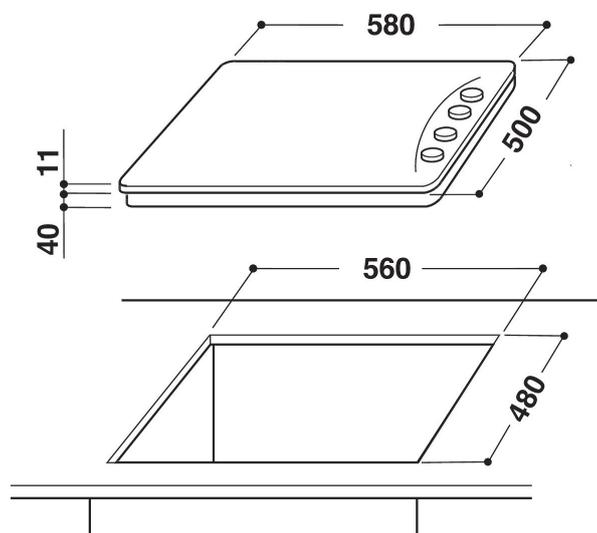

- Enamel Pan Supports
- Electromagnetic safety device for each burner
- 2 Rectangular N.4 Rod iron grids
- Lateral controls
- 60 cm hob
- Mechanical control
- Ignition type: knob
- Inox Hob
- 3 Burners
- 1 Plate on Indicator
- 3 burners: 1 Rapid 3000 W burner, 1 Rapid electric 1500 W burner.
- Power on indicator
- Supply cord included
- One electric plate
- 1 Rapid 3000 W
- Dimensions HxWxD: 41x580x500 mm

# AKM 261/IX

12NC: 857126135700

GTIN (EAN) code: 8003437932717

**Whirlpool**

SENSING THE DIFFERENCE

## MAIN FEATURES

Product group	Hob
Construction type	Built-in
Type of control	Mechanical
Type of control settings	N/A
Number of gas burners	3
Number of electric cooking zones	0
Number of electric plates	1
Number of radiant plates	0
Number of halogen plates	0
Number of induction plates	0
Number of electric warming zones	0
Location of control panel	Lateral
Basic surface material	Inox
Main colour of product	Inox
Electrical connection rating (W)	1500
Gas connection rating (W)	5900
Current (A)	6,5
Voltage (V)	220-240
Frequency (Hz)	50/60
Length of Electrical Supply Cord (cm)	0
Plug type	No
Gas connection	Cilindric
Width of the product	580
Height of the product	41
Depth of the product	500
Minimum niche height	30
Minimum niche width	560
Niche depth	480
Net weight (kg)	9.5
Automatic programmes	No

## TECHNICAL FEATURES

Power on indicator	Yes
Number of indicators	1
Type of regulation	Step energy regulated
Type of lid	Glass
Residual heat indicator	Without
Main on/off switch	No
Safety device	Yes
Timer	No

## PERFORMANCES

Energy input	Mixed
--------------	-------